

CW Series

Ideal for wash bays, golf courses and restaurant applications, this stainless-steel pressure washer offers a superior package design combined with a quiet operating system.

ELECTRIC - BELT DRIVE


STATIONARY



CW-2004-SME1 comes standard with low pressure detergent injector

Pump: Belt drive triplex piston General pump with ceramic plungers • Stainless-steel and brass unloader mounted on base plate • Forged brass manifold • Thermal relief valve • In-line water strainer • Quick connect low pressure detergent injection • Bypass system • 175°F hot packing kit
Motor: Open drip-proof motor (1000- & 3000-PSI models) • Totally enclosed fan-cooled electric motor with manual thermal overload protection (2000-PSI models) • 4-foot electrical cord with ground fault circuit interrupter (NEMA 5-20P, 20-amp plug on 1000-PSI model)
Frame: Easy-to-access cabinet design • Rubber isolators
Components: Dual cogged belt drive system • Conveniently located on/off switch • Time delay shutdown will shut unit off automatically when trigger gun is released and timer reaches setting
Accessories: Quick connect nozzles (0°, 15°, 25° and 40°) • 50-foot x 3/8-inch non-marking hose with quick connects, swivel and bend restrictors • Professional-grade insulated trigger gun with safety lock-off • Adjustable pressure insulated dual lance


Pressure Washers

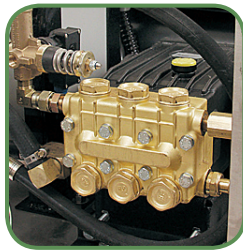

Pump accepts incoming water up to 175°F




Removable panel for pump access

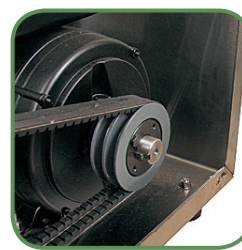

Stainless-steel base and frame

Model No.	PSI	GPM	HP/Motor	Plug Type	Dimensions (LxWxH)	Ship Wt.	Net Wt.
CW-1003-SME1	1000	2.5	2.0/120V, 1Ø, 18.8A	NEMA 5-20P	29.5in.x20.5in.x15in.	222 lbs.	172 lbs.
CW-2004-SME1	2000	3.9	6.0/230V, 1Ø, 24.1A	NEMA L6-30P	29.5in.x20.5in.x15in.	272 lbs.	214 lbs.
CW-2004-SME3	2000	3.9	6.0/230V, 3Ø, 15.0A	NEMA L15-20P	29.5in.x20.5in.x15in.	262 lbs.	204 lbs.
CW-3004-SME1*	3000	3.5	8.0/230V, 1Ø, 37.0A	NEMA 6-50P	29.5in.x20.5in.x15in.	302 lbs.	244 lbs.
CW-3004-SME3	3000	3.5	8.0/230V, 3Ø, 20.0A	NEMA L15-30P	29.5in.x20.5in.x15in.	292 lbs.	234 lbs.

*CSA certification is pending.

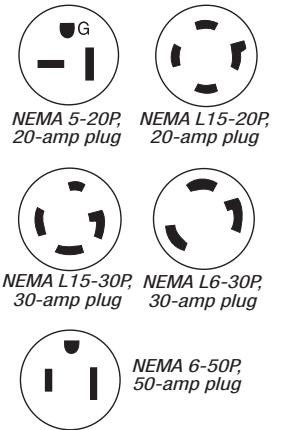

Options

AW-9501-0000

Stainless-steel wall mounting bracket - Provides a permanent location for your pressure washer in a shop or plant facility

CX-0069

Auto start/stop - When trigger gun is released, the timer will turn unit off; when trigger gun is pulled unit will start

CX-0076, CX-0077

460V, 3-Phase models - For when you have 460-volts of power available

CX-0078

Remote box - Adds control box which may be mounted away from the unit to control on/off



Optional stainless-steel wall mounting bracket available (AW-9501-0000)

Model #	AW-9501-0000	CX-0069	CX-0076	CX-0077	CX-0078
CW-1003-SME1	●	●			●
CW-2004-SME1	●	●			●
CW-2004-SME3	●	●	●		●
CW-3004-SME1	●	●			●
CW-3004-SME3	●	●		●	●

