

HDC Specifications

Model No.	PSI	GPM	Displacement~ or HP/Engine	Gas Tank Cap.	Burner Fuel Tank Cap.	Dimensions (LxWxH)	Ship Wt.	Net Wt.
HDC-3005-OK6G	3000	4.8	624cc Kohler	10.0 gallon	10.0 gallon	50in.x34in.x45in.	844 lbs.	725 lbs.
HDC-3005-OV6G	3000	4.8	480cc Vanguard OHV	10.0 gallon	10.0 gallon	50in.x34in.x45in.	844 lbs.	725 lbs.
HDC-3505-OB7G*	3500	4.7	15.5 HP Kubota	10.0 gallon	10.0 gallon	56.5in.x34in.x45in.	940 lbs.	836 lbs.
HDC-3505-OH6G	3500	4.7	614cc Honda OHV	10.0 gallon	10.0 gallon	50in.x34in.x45in.	844 lbs.	725 lbs.
HDC-3505-OK6G	3500	4.7	624cc Kohler	10.0 gallon	10.0 gallon	50in.x34in.x45in.	844 lbs.	725 lbs.
HDC-3505-OV6G	3500	4.7	627cc Vanguard OHV	10.0 gallon	10.0 gallon	50in.x34in.x45in.	844 lbs.	725 lbs.

Model No.	PSI	GPM	Displacement~ or HP/Engine	Gas Tank Cap.	Burner Fuel Tank Cap.	Dimensions (LxWxH)	Ship Wt.	Net Wt.
HDC-4004-OH6A#	4000	4.0	614cc Honda OHV	10.0 gallon	10.0 gallon	50in.x34in.x45in.	844 lbs.	725 lbs.
HDC-4004-OK6A#	4000	4.0	624cc Kohler	10.0 gallon	10.0 gallon	50in.x34in.x45in.	844 lbs.	725 lbs.
HDC-4004-OV6A#	4000	4.0	627cc Vanguard OHV	10.0 gallon	10.0 gallon	50in.x34in.x45in.	844 lbs.	725 lbs.

~ As rated by engine manufacturer *Diesel unit.
#Models equipped with AR pump, all other models equipped with General pumps.

Options:

- 50-0170
- 850-0324
- AW-5740-0000
- HX-0130
- HX-0200
- HX-0212
- HX-0147
- HX-0156

- Stack adapter** - Allows 8-inch flue pipe to be installed to boiler exhaust port
- Gasket (for 50-0170)** - Seals between 50-0170 stack adapter and boiler housing
- Wheel kit** - Allows unit to become portable (See photo on front cover)
- Three-way ball valve** - Allows pressure washer to be operated from garden hose /float tank or trailer supply tank by adjusting ball valve lever
- Trapping unloader** - High pressure water is trapped in outlet hose when trigger gun is released
- Adjustable temperature control** - Operator is able to adjust outlet water temperature between 60°-250°
- Four (4) point lifting capability** - Allows unit to be lifted by a crane
- Hour meter** - Displays number of hours unit has been in operation

Model #	50-0170	850-0324	AW-5740-0000	HX-0130	HX-0212	HX-0147	HX-0156	HX-0200
HDC-3005	●	●	●	●	●	●	●	●
HDC-3505	●	●	●	●	●	●	●	●
HDC-4004	●	●	●	●	●	●	●	●



Hot Water Pressure Washers HDC Series



Distributed by:



HDC Series

The HDC Series is the most affordable and efficient skid on the market today. The best buy for a quick return on investment.

GASOLINE/DIESEL - BELT DRIVE

STATIONARY - SKID MOUNT



High quality fuel filter/water separator ensures clean fuel supply



Stainless-steel coil wrap



12-volt burner (battery not included)



Large polyethylene float tank



On/Off burner switch

Shown with optional adjustable thermostat (HX-0145)

1/2-inch schedule 80-coil with stainless-steel wrap heat exchanger

Battery box (battery not included)

Additional Features:

- ✓ Forged brass manifold with removable valve caps
- ✓ Factory preset unloader (3000 to 4000-PSI models)
- ✓ Pressure relief valve protects against excessive system pressure
- ✓ Temperature rise 150°F/66°C above ambient
- ✓ No. 1 or No. 2 diesel or kerosene fired burner (Bio-fuel not approved at this time)

Heavy-duty powder coated steel square tube frame

10-gallon gas tank capacity

Professional-grade insulated trigger gun with safety lock-off

50-foot x 3/8-inch steel wire-braided pressure hose with quick connects

10-gallon burner fuel tank capacity


Adjustable pressure insulated dual lance

Belt drive triplex General or AR pump with ceramic plungers

Electric start engine

Adjustable high pressure detergent injection

Performance-proven industrial gasoline engine

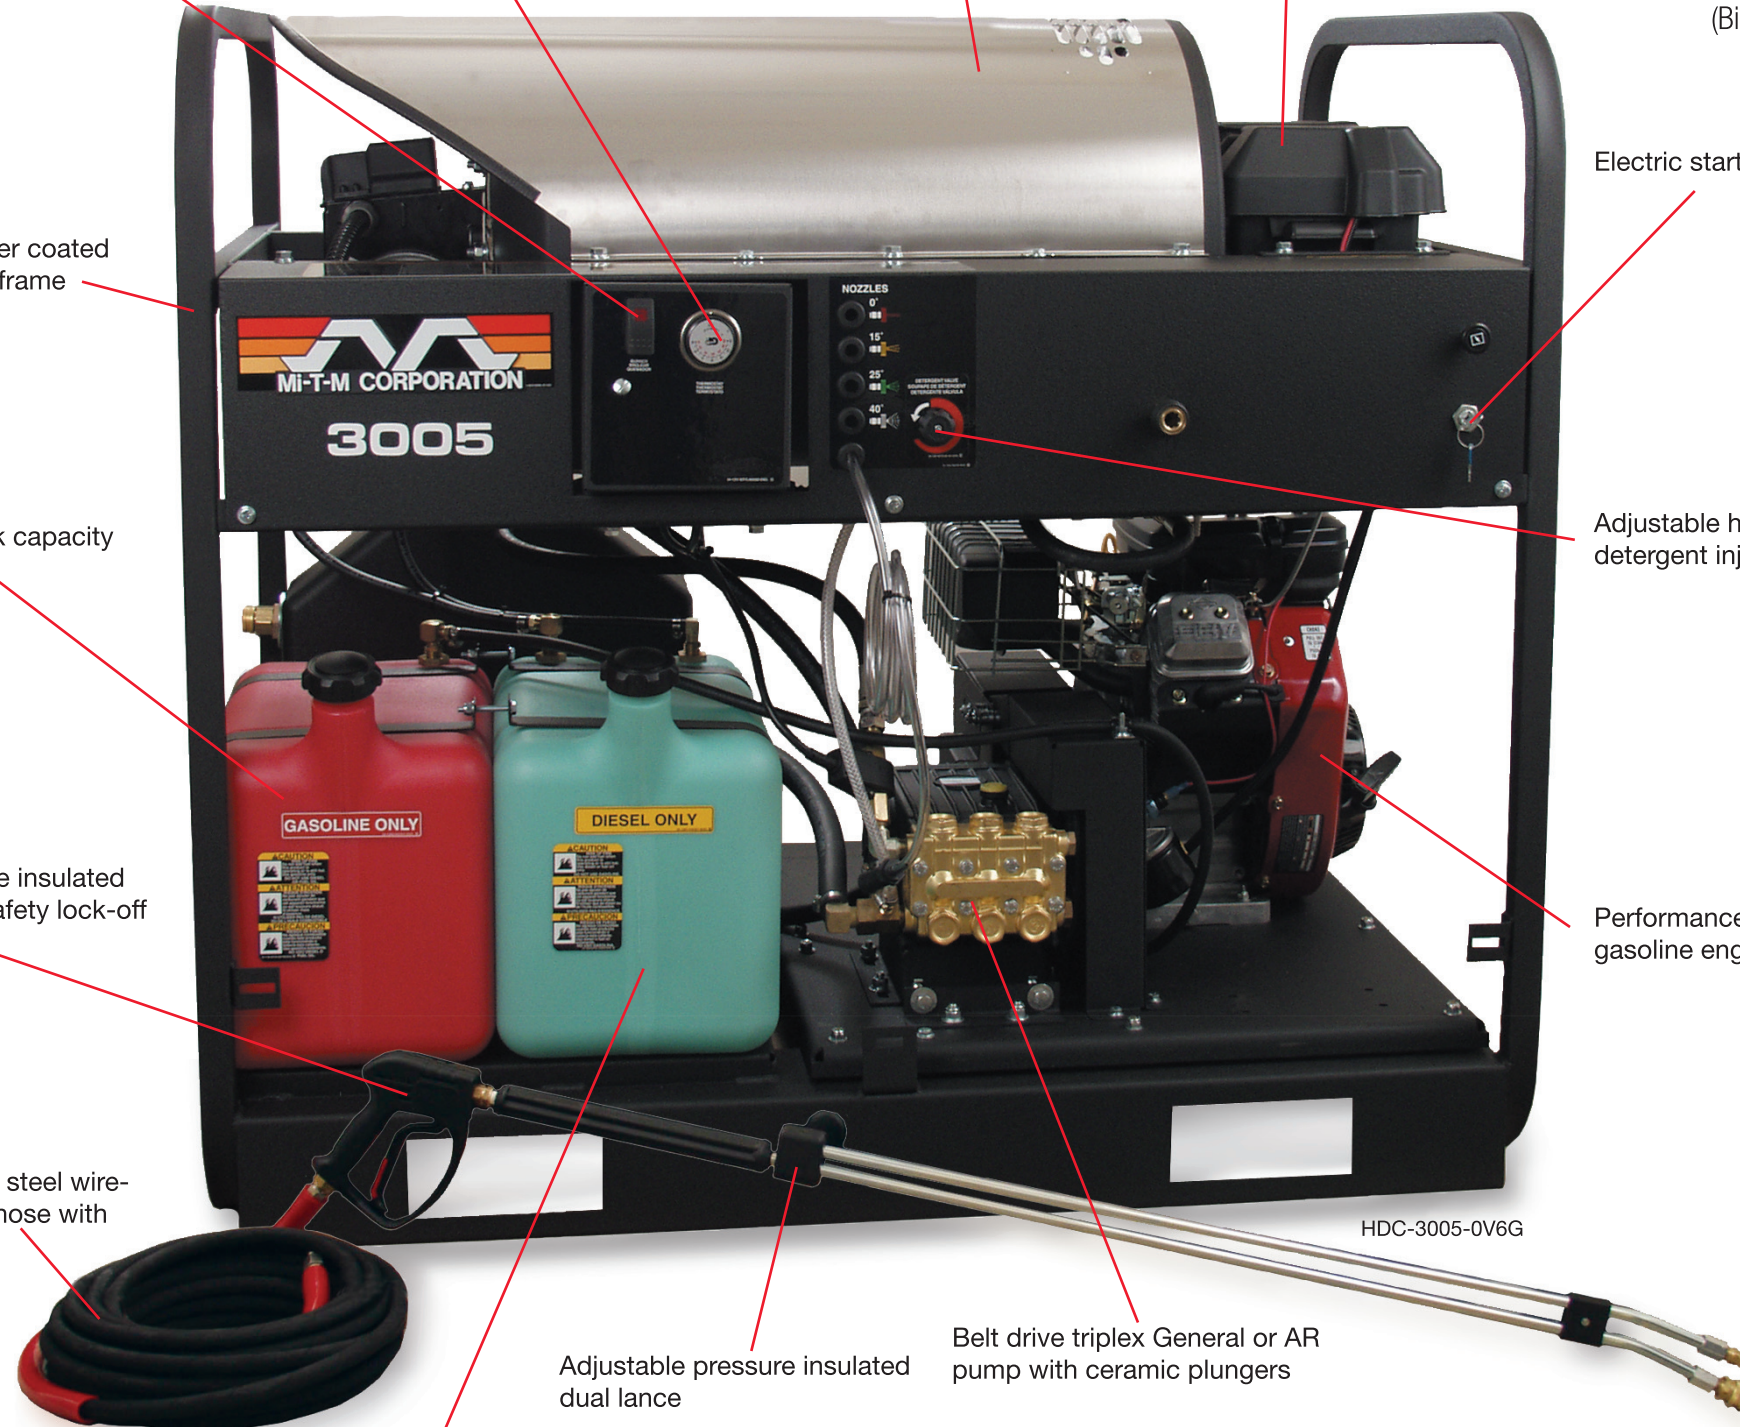

HDC-3005-0V6G

