

# JP Series

Optimal balance and maneuverability represent just a few of the great benefits the JP Series offers with its extended handle design. The Mi-T-M quality and durability you've come to expect also shines through with its 1-inch mild steel construction.

ELECTRIC - DIRECT DRIVE

PORTABLE



JP-2003-1ME1

Pressure Washers

**Pump:** Direct drive triplex piston General or AR pump with ceramic plungers • Stainless-steel and brass unloader • Adjustable pressure • Forged brass manifold • Thermal relief valve • Safety relief valve • In-line water strainer • Adjustable low pressure detergent injection


**Motor:** Totally enclosed fan-cooled electric motor • 35-foot power cord (ground fault circuit interrupter, GFCI, on 1.5- to 6.0-HP single-phase models) • NEMA 5-20P, 20-amp plug (1500-PSI models)

**Frame:** Solid steel axle (threaded on 2000- to 3000-PSI models) • Pneumatic tires with tubes for longer life • Dual rubber isolators

**Accessories:** Variable high/low pressure nozzle (1000- to 2000-PSI models) • Quick connect nozzles (0°, 15° and 25°) (2500- & 3000-PSI models) • 25-foot x 3/8-inch non-marking hose with quick connects, swivel and bend restrictors • Professional-grade insulated trigger gun with safety lock-off • 36-inch lance with rubber grip



1-inch powder coated steel tube handles for easier pulling

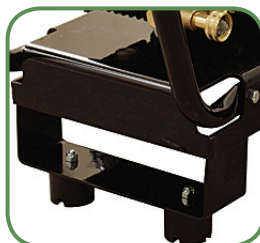

3/16-inch powder coated and welded steel base plate




Convenient gun/wand holder and hose wrap

# JP Series

PORTABLE

ELECTRIC - DIRECT DRIVE

Model No.	PSI	GPM	HP/Motor	Plug Type	Dimensions (LxWxH)	Ship Wt.	Net Wt.
JP-1002-0ME1 <sup>*A#</sup>	1000	2.0	1.5/120V, 1Ø, 15.0A	NEMA 5-15P	37in.x21in.x24.5in.	120 lbs.	90 lbs.
JP-1002-2ME1 <sup>*A#+</sup>	1000	2.0	1.5/120V, 1Ø, 15.0A	NEMA 5-15P	37in.x21in.x24.5in.	120 lbs.	90 lbs.
JP-1502-0ME1 <sup>*A#</sup>	1500	2.0	2.0/120V, 1Ø, 20.0A	NEMA 5-20P	37in.x21in.x24.5in.	120 lbs.	90 lbs.
JP-1502-2ME1 <sup>*A#+</sup>	1500	2.0	2.0/120V, 1Ø, 20.0A	NEMA 5-20P	37in.x21in.x24.5in.	120 lbs.	90 lbs.
JP-2003-1ME1 <sup>*A#</sup>	2000	2.8	4.0/230V, 1Ø, 16.0A	NEMA L6-20P	37in.x21in.x24.5in.	162 lbs.	112 lbs.
JP-2503-1ME1 <sup>*A</sup>	2500	3.2	6.0/230V, 1Ø, 24.1A	NEMA L6-30P	44in.x26in.x27in.	275 lbs.	225 lbs.
JP-2503-0ME3	2500	3.2	6.0/230V, 3Ø, 15.0A or 6.0/460V, 3Ø, 7.5A	NEMA L15-20P	44in.x26in.x27in.	275 lbs.	225 lbs.
JP-3004-1ME1 <sup>^</sup>	3000	3.9	8.0/230V, 1Ø, 34.5A	NEMA 6-50P	44in.x26in.x27in.	275 lbs.	225 lbs.
JP-3004-0ME3	3000	3.9	8.0/230V, 3Ø, 20.0A or 8.0/460V, 3Ø, 10.0A	NEMA L15-30P	44in.x26in.x27in.	275 lbs.	225 lbs.

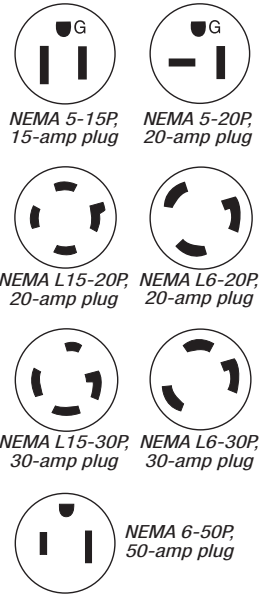

*\*35-foot cord with ground fault circuit interrupter (GFCI).  
<sup>^</sup>Single-phase models are CSA certified.  
<sup>#</sup>Models are equipped with General pumps, all other models are equipped with AR pumps.  
<sup>+</sup>Pump accepts incoming water up to 180-degrees.*

### Options

50-0161	High pressure detergent injection - High pressure water mixes with detergent to clean even the heaviest build-up
CX-0005	Insulated dual lance- Has both a high and low pressure tip that allows you to switch to the low pressure chemical injector without having to change tips
CX-0030	50-foot high pressure hose- For when you need extra hose for added mobility
CX-0066, CX-0067	460V on 6.0- & 8.0-HP, 3-phase models- For when you have 460-volts of power available
TX-1002-W	Puncture-proof tires- Tires are flat-free, maintenance-free and non-marking, 10-inch, white hub, two tires
TX-1302-W	Puncture-proof tires- Tires are flat-free, maintenance-free and non-marking, 13-inch, white hub, two tires

Model #	50-0161	CX-0005	CX-0030	CX-0066	CX-0067	TX-1002-W	TX-1302-W
1000-1500 PSI	●	●	●			●	
2000 PSI	●	●				●	
2500-3000 PSI	●	●					●
JP-2503-0ME3	●	●		●			●
JP-3004-0ME3	●	●			●		●



**1 YEAR LIMITED** PARTS & LABOR WARRANTY  
**1 YEAR LIMITED** ELECTRIC MOTOR WARRANTY  
**7 YEAR LIMITED** PUMP WARRANTY

Certified in USA & Canada: JP-1002, JP-1502  
 Certified in USA Only: JP-2003, JP-2503, JP-3004 Single Phase Models

US CERTIFIED Single Phase Models  
 US CERTIFIED Models